

# LOTUS Pendant

120v: **2-6107-xxx**

# oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_ DATE \_\_\_\_\_



### Diffusers:




-24 Satin Nickel

-1 White Opal Glass

-3 Perforated Metal Sleeve

Shown with perforated sleeve

- LIGHT SOURCE** 1 x 13W Quad 4 pin fluorescent (G24q-1)  
(Lamp not included)
- RATED LIFE** See lamp manufacturer specification
- LUMEN OUTPUT** Initial: 900 lm
- INPUT VOLTAGE** 120V
- BALLAST** Electronic, HPF, Instant start, 120V
- CONSTRUCTION** Plated Steel and Glass
- DIFFUSER / METAL FINISH**  
(-124) White Opal Glass / Satin Nickel  
(-324) Perforated Metal Sleeve / Satin Nickel
- MOUNTING** 4" Octagonal J-Box
- STANDARDS** UL/Damp listed, ADA compliant, CEC Title 24 Compliant,  
Conforms to UL STD 1598, Certified CAN/CSA

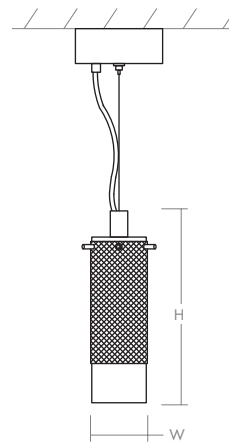

### DIMENSIONS

**Dia. Canopy:** 5.00"

**Dia. Fixture:** 3.25"

**H. Fixture:** 9.50"

Supplied with 8 ft of cord and cable

Order Example: **3-519-14** (x- Voltage xxx- Sequence # xx- Finish)  
3: 120v, 37: 277v, 32: Universal Voltage

