

**TEMPUS Wall Sconce**  
**3-5000-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-24 Satin Nickel



-15 Black




-20 Polished Nickel



-40 Aged Brass

<b>LIGHT SOURCE</b>	1 x 9W LED, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	11.3W at 120V
<b>RATED LIFE</b>	60000 hr RL
<b>LUMEN OUTPUT</b>	Delivered: 687 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V, 60Hz
<b>DRIVER OUTPUT</b>	350mA, 15W max
<b>DIMMING</b>	TRIAC Dimming
<b>CONSTRUCTION</b>	Plated Steel and Acrylic
<b>DIFFUSER</b>	- Matte White Acrylic
<b>FINISHES</b>	Black (-15), Polished Nickel (-20), Satin Nickel (-24), Aged Brass (-40)
<b>MOUNTING</b>	4" Octagonal J-Box* 4"x4" Square J-Box* with single device mud ring * Deep J-Box (Required to house driver)
<b>STANDARDS</b>	ETL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

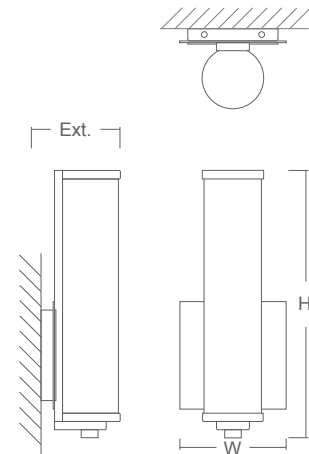

**DIMENSIONS**  
**W: 5.125"**  
**H: 12.75"**  
**Ext: 4.00"**  
**M.C: 8.75" From Top of Fixture**

Order example for standard fixture:

**3-5000-xx** (x-Voltage - xxx-Sequence # - xx-Finish)

