

**METRIX Vanity**  
**3-542-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_  
PROJECT \_\_\_\_\_ DATE \_\_\_\_\_




-24 Satin Nickel



-20 Polished Nickel

- LIGHT SOURCE** 1 x 11.7W LED, 3000K, CRI 90
- LUMINAIRE POWER** 14.2W at 120V
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: 1083 lm (LM-79)
- INPUT VOLTAGE** 120V to 277V AC, 50/60Hz
- DRIVER OUTPUT** 350mA, 14.7W max power
- DIMMING** TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
- CONSTRUCTION** Plated Steel and Acrylic
- DIFFUSER** - Matte White Acrylic
- FINISHES** Polished Nickel (-20), Satin Nickel (-24)
- MOUNTING** 2" x 3" J-Box, 4" Octagonal J-Box, 4" Square J-Box with a single device mud ring
- STANDARDS** UL Dry/Damp listed, ADA Compliant, CEC Title 24 Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

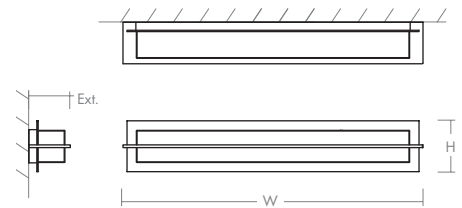

**DIMENSIONS**

- W:** 28.00"
- H:** 4.75"
- Ext:** 3.88"
- M.C:** 2.38" From top of fixture

Order example for standard fixture:  
**3-542-24** (x- Voltage - xxx-Sequence # - xx-Finish)  
**3:** 120V to 277V  
 Order example for optional color temperatures: **3-542-2724**  
**27:** 2700K, **35:** 3500K, **40:** 4000K

