

**KIKO Wall Sconce**  
**3-545-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_




-20 Polished Nickel



-24 Satin Nickel

- LIGHT SOURCE** 1 x 10.1W LED, 3000K, CRI 90
- LUMINAIRE POWER** 12.3W at 120V
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: 494 lm (LM-79)
- INPUT VOLTAGE** 120V to 277V AC, 50/60Hz
- DRIVER OUTPUT** 350mA, 14.7W max power
- DIMMING** TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
- CONSTRUCTION** Plated Steel and Acrylic
- DIFFUSER** - Matte White Acrylic
- FINISHES** Polished Nickel (-20), Satin Nickel (-24)
- MOUNTING** 4" Square J-Box\* with a single device mud ring  
\*Deep J-Box (Required to house driver)
- STANDARDS** UL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

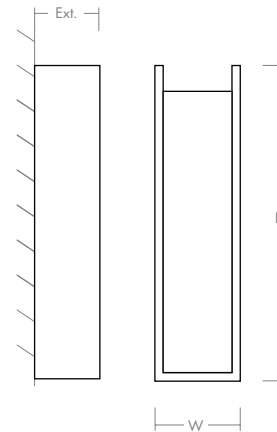

- DIMENSIONS**
- W:** 3.25"
  - H:** 12.00"
  - Ext:** 2.50"
  - M.C:** 6.62" From top of fixture

Order example for standard fixture:  
**3-545-24** (x- Voltage - xxx-Sequence # - xx-Finish)  
**3:** 120V to 277V  
 Order example for optional color temperatures: **3-545-2724**  
**27:** 2700K, **35:** 3500K, **40:** 4000K

