

CIRRO Pendant
3-61-xx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____




-6 White



-15 Black

LIGHT SOURCE	LED Array, 3000K, CRI 90
LUMINAIRE POWER	90.6W at 120V
RATED LIFE	50000 hr RL
OPTIONAL COLOR TEMPERATURES	3000K Only
LUMEN OUTPUT	Delivered: 5674 lm (LM-79)
INPUT VOLTAGE	120V AC, 50/60Hz
DRIVER OUTPUT	2600mA, 85W
DIMMING	TRIAC Dimming
CONSTRUCTION	Cold Rolled Steel Canopy, Formed Aluminum Housing
DIFFUSER	- Flexible Matte White Silicone
FINISHES	White (-6), Black (-15), Silver Graphite (-30)
MOUNTING	4" Octagonal J-Box
STANDARDS	ETL Dry listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

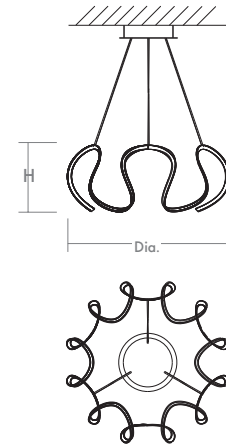

DIMENSIONS

Dia. Fixture: 28.00"
H. Fixture: 11.50"
*** Hanging height adjustable with 8ft. cables**

Order example for standard fixture:
3-61-15 (x- Voltage - xxx-Sequence # - xx-Finish)
3: 120V Only

