

**TOTEM Pendant**  
**3-614-xxxx**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_




-1624 Gray/Satin Nickel Lit



-1540 Dark Gray/Aged Brass

<b>LIGHT SOURCE</b>	LED Array with Driver on Board
<b>LUMINAIRE POWER</b>	6.04W at 120V
<b>RATED LIFE</b>	50000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	3000K Only
<b>LUMEN OUTPUT</b>	Delivered: 303 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V AC, 50/60Hz
<b>DRIVER OUTPUT</b>	Driver is integrated into LED Array
<b>DIMMING</b>	TRIAC and ELV Dimming
<b>CONSTRUCTION</b>	Concrete and Steel
<b>DIFFUSER</b>	- Clear Acrylic
<b>FINISHES</b>	Dark Gray/Aged Brass (-1540), Gray/Satin Nickel (-1624)
<b>MOUNTING</b>	4" Octagonal J-Box *Junction box must be securely mounted to building structure and capable of supporting at least 15 pounds.
<b>STANDARDS</b>	cETL Damp Listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

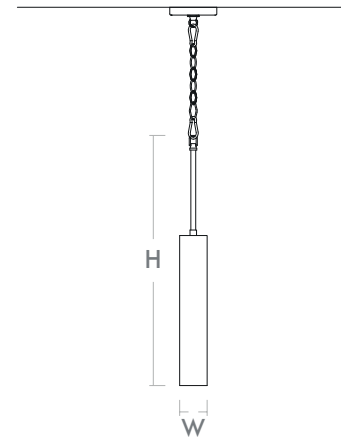

**DIMENSIONS**

**W. Fixture:** 2.75"  
**H. Fixture:** 26.125"  
 \* Measured using 1-8" stem for minimum hanging height  
**Weight:** 7.8 lbs.  
 Supplied with 2-8", 2-12", and 2-16" stems plus 1' of chain

Order example for standard fixture:  
**3-614-1540** (x- Voltage - xxx-Sequence # - xx-Finish)  
 3: 120V Only

