

UTOPIA Chandelier
3-6141-xx

oxygen

FIXTURE TYPE _____ LOCATION _____
 PROJECT _____ DATE _____




-15 Black



-24 Satin Nickel

LIGHT SOURCE	LED Arrays, 3000K, CRI 90
LUMINAIRE POWER	63.1W at 120V
RATED LIFE	50000 hr RL
OPTIONAL COLOR TEMPERATURES	3000K Only
LUMEN OUTPUT	Delivered: 2401 lm (LM-79)
INPUT VOLTAGE	120V AC, 50/60Hz
DRIVER OUTPUT	24Vdc Constant Voltage, 3.2A max current
DIMMING	TRIAC Dimming (Forward Phase, Magnetic Low Voltage)
CONSTRUCTION	Cold Rolled Steel Housing and Canopy
DIFFUSER	- Matte White Acrylic
FINISHES	Black (-15), Satin Nickel (-24)
MOUNTING	4" Octagonal J-Box
STANDARDS	ETL Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

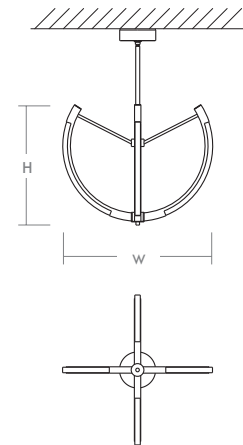

DIMENSIONS

Dia. Canopy: 6.69"
W. Fixture: 28.00"
H. Fixture: 22.375"
 Supplied with 2-8", 2-12", and 3-16" stems to customize hanging height

Note: Canopy swivel allows up to a 22° slope

Order example for standard fixture:
3-6141-24 (x- Voltage - xxx-Sequence # - xx-Finish)
 3: 120V Only

