

SPACELY Pendant
3-646-1540

oxygen

FIXTURE TYPE _____

LOCATION _____


PROJECT _____

DATE _____



-1540 Black/Aged Brass

| | |
|------------------------------------|--|
| LIGHT SOURCE | (1x) 12.5W LED Array, 3000K, CRI 90 |
| LUMINAIRE POWER | 12.8W at 120V |
| RATED LIFE | 30000 hr RL |
| OPTIONAL COLOR TEMPERATURES | 3000K Only |
| LUMEN OUTPUT | Delivered: 669 lm (LM-79) |
| INPUT VOLTAGE | 120V AC, 50/60Hz |
| DRIVER OUTPUT | 300mA, 10.8W max power |
| DIMMING | TRIAC Dimming |
| CONSTRUCTION | Cold Rolled Steel Housing and Canopy |
| DIFFUSER | - Matte White Acrylic |
| FINISHES | Black/Aged Brass (-1540) |
| MOUNTING | 4" Octagonal J-Box |
| STANDARDS | cETL Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0. |

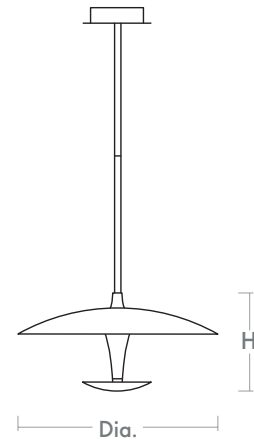

DIMENSIONS

Dia. Fixture: 17.75"
H. Fixture: 8.625"
Supplied with 2-8", 2-12", and 3-16"
stems to customize hanging height

Note: Canopy swivel allows up to a 45° slope

Order example for standard fixture:
3-646-1540 (x- Voltage - xxx-Sequence # - xx-Finish)
3: 120V Only

