

STYLUS Pendant
3-66-xx

oxygen

FIXTURE TYPE _____

LOCATION _____


PROJECT _____

DATE _____



-15 Black

LIGHT SOURCE	LED Array, 3000K, CRI 90
LUMINAIRE POWER	17.75W at 120V
RATED LIFE	50000 hr RL
OPTIONAL COLOR TEMPERATURES	3000K Only
LUMEN OUTPUT	Delivered: 367 lm (LM-79)
INPUT VOLTAGE	120V AC, 50/60Hz
DRIVER OUTPUT	450mA, 16.15W
DIMMING	TRIAC Dimming
CONSTRUCTION	Cold Rolled Steel Housing and Canopy
DIFFUSER	- Matte White Acrylic
FINISHES	White (-6), Black (-15), Satin Nickel (-24), Aged Brass (-40)
MOUNTING	4" Octagonal J-Box
STANDARDS	ETL Dry listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

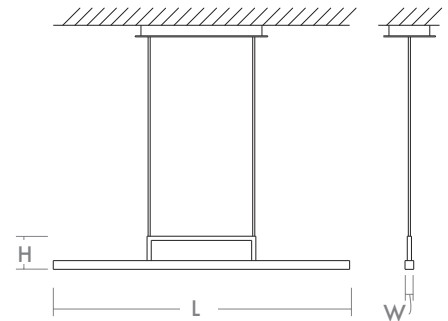

DIMENSIONS

Canopy: 15.00" L x 5.90" W x 1.20" H

Fixture: 33.50" L x 1.00" W x 3.75" H

*** Hanging height adjustable
with 8ft. cables**

Order example for standard fixture:
3-66-15 (x- Voltage - xxx-Sequence # - xx-Finish)
3: 120V Only

