

**LUNA Pendant**  
**3-671-xx**


oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_  
PROJECT \_\_\_\_\_ DATE \_\_\_\_\_



-20 Polished Nickel      -22 Oiled Bronze      -24 Satin Nickel      -40 Aged Brass

- LIGHT SOURCE** 1 x 6.1W LED, 3000K, CRI 90
- LUMINAIRE POWER** 7.2W at 120V
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: 368 lm (LM-79)
- INPUT VOLTAGE** 120V to 277V AC, 50/60Hz
- DRIVER OUTPUT** 180mA, 7.6W max power
- DIMMING** TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
- CONSTRUCTION** Plated Steel and Glass
- DIFFUSER** - White Opal Glass
- FINISHES** Polished Nickel (-20), Oiled Bronze (-22), Satin Nickel (-24), Aged Brass (-40)
- MOUNTING** 4" Octagonal J-Box\*, 4" Square J-Box\* with a single device mud ring  
\* Deep J-Box (Required to house driver)
- STANDARDS** UL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

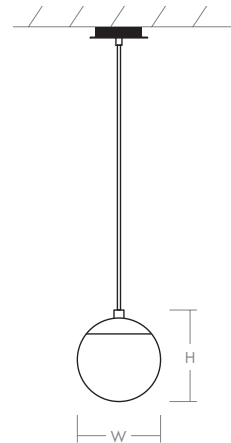

**DIMENSIONS**  
**Dia. Canopy: 5.88"**  
**W. Fixture: 8.00"**  
**H. Fixture: 9.50"**  
 Supplied with 10 ft braided cord

Order example for standard fixture:  
**3-671-24** (x- Voltage - xxx-Sequence # - xx-Finish)  
 3: 120V to 277V  
 Order example for optional color temperatures: **3-671-2724**  
 27: 2700K, 35: 3500K, 40: 4000K

