

NITRO Outdoor
3-725-xx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____




-15 Black



-24 Satin Nickel

- LIGHT SOURCE** (1x) 7.7W LED Array, 3000K, CRI 90
- LUMINAIRE POWER** 7.2W at 120V
- RATED LIFE** 30000 hr RL
- OPTIONAL COLOR TEMPERATURES** 3000K Only
- LUMEN OUTPUT** Delivered: TBD lm (LM-79)
- INPUT VOLTAGE** 120V AC, 50/60Hz
- DRIVER OUTPUT** 160mA, 6W max power
- DIMMING** TRIAC Dimming
- CONSTRUCTION** Cast Aluminum Housing
- DIFFUSER** - Clear Chiseled Glass
- FINISHES** Black (-15), Satin Nickel (-24)
- MOUNTING** 4" Octagonal J-Box
(Installer must provide a bead of caulk between fixture housing and mounting surface)
- STANDARDS** ETL Wet listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

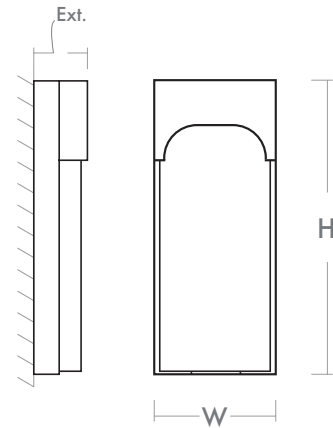

DIMENSIONS

- W:** 5.50"
- H:** 13.00"
- Ext:** 2.375"
- M.C:** 2.6875" From top of fixture

Order example for standard fixture:
3-725-15 (x- Voltage - xxx-Sequence # - xx-Finish)
3: 120V Only

