

KARME Outdoor
3-739-xx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____




-16 Gray



-22 Oiled Bronze

LIGHT SOURCE	1 x 12.1W LED, 3000K, CRI 90
LUMINAIRE POWER	14.7W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 374 lm (LM-79)
INPUT VOLTAGE	120V to 277V AC, 50/60Hz
DRIVER OUTPUT	350mA, 14.7W max power
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
CONSTRUCTION	Cast aluminum and Polycarbonate
DIFFUSER	- White Polycarbonate
FINISHES	Gray (-16), Oiled Bronze (-22)
MOUNTING	2" x 3" J-Box, 4" Square J-Box with a single device mud ring (Installer must provide a bead of caulk between fixture housing and mounting surface)
STANDARDS	UL Wet listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

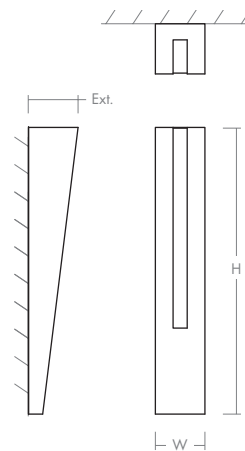

DIMENSIONS

W:	3.50"
H:	20.00"
Ext:	3.50"
M.C:	10.00" From top of fixture

Order example for standard fixture:

3-739-22 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-739-2722**

27: 2700K, **35:** 3500K, **40:** 4000K

