

MAIA Outdoor
3-742-xx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____



-16 Gray



-22 Oiled Bronze



Top View

LIGHT SOURCE 2 x 12.1W LED, 3000K, CRI 90

LUMINAIRE POWER 28.7W at 120V

RATED LIFE 60000 hr RL

OPTIONAL COLOR TEMPERATURES 2700K, 3500K, 4000K

LUMEN OUTPUT Delivered: 963 lm (LM-79)

INPUT VOLTAGE 120V to 277V AC, 50/60Hz

DRIVER OUTPUT 700mA, 29.4W max power

DIMMING TRIAC and ELV dimming at 120V AC;
0-10V dimming, 100% to 1% current output


CONSTRUCTION Cast Aluminum and Polycarbonate

DIFFUSER - White Polycarbonate

FINISHES Gray (-16), Oiled Bronze (-22)

MOUNTING 4" Octagonal J-Box **,
4" Square J-Box* with a single device mud ring
*Deep J-Box (Required to house driver)
**Deep J-Box and Backplate required to cover J-Box
(Installer must provide a bead of caulk between fixture housing
and mounting surface)

STANDARDS UL Wet listed, ADA Compliant, Conforms to UL STD 1598,
Certified CAN/CSA STD C22.2 No 250.0.

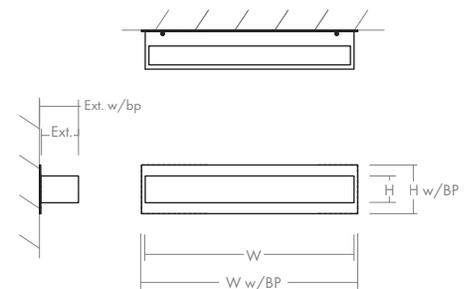

DIMENSIONS

W: 23.25"

H: 2.75"

Ext: 3.88"

M.C: 1.38" From top of fixture

With optional backplate

W: 24.00"

H: 5.00"

Ext: 4.00"

M.C: 2.50" From top of fixture

Order example for standard fixture:

3-742-22 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-742-2722**

27: 2700K, **35:** 3500K, **40:** 4000K

