

RICKIE Outdoor
3-747-xx

oxygen

FIXTURE TYPE _____


LOCATION _____

PROJECT _____

DATE _____



-16 Brushed Aluminum



-15 Black

LIGHT SOURCE LED Arrays, 3000K, CRI 90

LUMINAIRE POWER 11.7W at 120V

RATED LIFE 50000 hr RL

OPTIONAL COLOR TEMPERATURES 3000K Only

LUMEN OUTPUT Delivered: 616 lm (LM-79)

INPUT VOLTAGE 100V to 277V AC, 50/60Hz

DRIVER OUTPUT 450mA, 18W max power

DIMMING Non-dimmable


CONSTRUCTION Cast Aluminum Housing

DIFFUSER - Clear Glass

FINISHES Black (-15), Brushed Aluminum (-16)

MOUNTING 4" Octagonal J-Box
(Installer must provide a bead of caulk between fixture housing and mounting surface)

STANDARDS ETL Wet listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

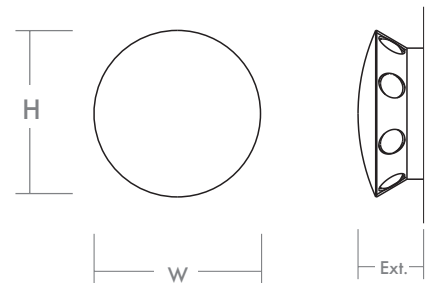

DIMENSIONS

W: 6.25"

H: 6.25"

Ext: 2.75"

M.C: 3.125" From top of fixture

Order example for standard fixture:

3-747-15 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120V to 277V

