

**ALBEDO Outdoor**  
**3-770-15**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_




-15 Black (Lit)



-15 Black

- LIGHT SOURCE** (1x) 6W LED with Driver on board, 3000K, CRI 90
- LUMINAIRE POWER** 6.6W Input Power
- RATED LIFE** 30000 hr RL
- OPTIONAL COLOR TEMPERATURES** 3000K Only
- LUMEN OUTPUT** Delivered: TBD lm (LM-79)
- INPUT VOLTAGE** 120V AC, 50/60Hz
- DIMMING** TRIAC Dimming 100-10%
- CONSTRUCTION** Cast Aluminum Housing
- DIFFUSER** - Clear Bubble Crystal Glass
- FINISHES** Black (-15)
- MOUNTING** 4" Octagonal J-Box  
(Installer must provide a bead of caulk between fixture housing and mounting surface)
- STANDARDS** cETL Wet listed, Conforms to UL STD 1598,  
Certified CAN/CSA STD C22.2 No 250.0.

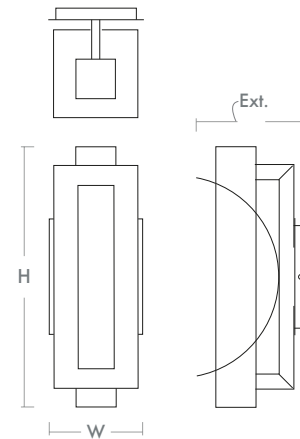

**DIMENSIONS**

- W:** 5.00"
- H:** 14.00"
- Ext:** 5.875"
- M.C:** 7.00" From top of fixture

Order example for standard fixture:  
**3-770-15** (x-xxx: LED Sequence # / -xx: Finish)

