

ZEPP Pendant
32-632-xx

oxygen

FIXTURE TYPE _____ LOCATION _____
PROJECT _____ DATE _____



-20 Polished Nickel




-24 Satin Nickel



-15 Black

- LIGHT SOURCE** 2 x 16W LED, 3000K, CRI 90
- LUMINAIRE POWER** 38.3W at 120V
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: 635 lm (LM-79)
- INPUT VOLTAGE** 120V & 277V AC, 50/60Hz
- DRIVER OUTPUT*** 42W max power @1000mA
- DIMMING** TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
- CONSTRUCTION** Plated Steel and Acrylic
- DIFFUSER** - Matte White Acrylic
- FINISHES** Black (-15), Polished Nickel (-20), Satin Nickel (-24)
- MOUNTING** 4" Octagonal J-Box, 4" Square J-Box with a single device mud ring
- STANDARDS** UL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

* 600-1200mA programmable driver, 50.4W max power @1200mA

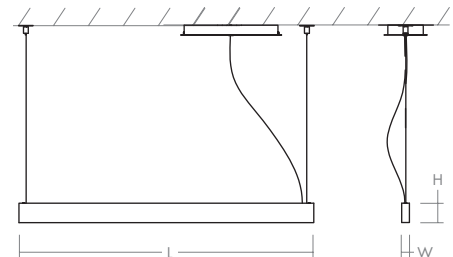

DIMENSIONS

Canopy: 13.00" L, 5.50" W, 1.375" H
Fixture: 38.00" L, 1.00" W, 2.50" H
Suspension Length: Up to 60"

Order example for standard fixture:

32-632-24 (x- Voltage - xxx-Sequence # - xx-Finish)

32: 120V & 277V

Order example for optional color temperatures: **32-632-2724**

27: 2700K, 35: 3500K, 40: 4000K

